



Driver retention is tough. Bluetooth Radio w/CD player, power windows & locks, A/C, cruise control, tilt & telescopic steering wheel, overhead storage, and cup holders will help. That's why it's STANDARD.



Selective Catalytic Reduction (SCR) Emissions Reduction System. Proprietary technology that lowers NOx emissions by more than 80%.



Have a large crew? The M Series crew cab has seating capacity for 7. Oh and don't worry, there is available rear heat and AC for all climates.



In today's busy world, driver distraction can be a dangerous problem. Our solution is to put your everyday controls at your finger tips to reduce time off the wheel. Also, our all new LED display allows for easier vehicle monitoring.



TELEMATICS, CASE MANAGEMENT, REMOTE DIAGNOSTICS...STANDARD.

At Hino we are leading the industry in supporting your business. From the moment you take delivery of your Hino INSIGHT equipped connected vehicle, you're on the road to more uptime and lower operating costs.



Combining Telematics, Remote Diagnostics and Case Management in one integrated platform, Hino INSIGHT puts critical vehicle and driver management tools at your fingertips.



TRUCKS

A Toyota Group Company

POWERON.

The Hino M Series models are designed specifically to cover a vast array of applications, not just from the standpoint of power, aerodynamics and durability, but also ease of use and safety. With all new available LED headlights and, the industry's first, fully integrated Lane Departure Warning system for its class, provides operators with additional safety features direct from the factory.

Available in both day and crew cab configurations, the Hino M Series trucks are ideal for applications ranging from 14,500 lbs. to 19,500 lbs. GVWR. Add the industry leading warranty and support from HinoCare and HinoWatch and you can see why Hino is the fastest growing medium duty truck brand in the U.S.A. - POWER ON.



2021

M | SERIES

HINO



ULTIMATE OWNERSHIP EXPERIENCE

OUR COMMITMENT

When you make the decision to go Hino, its about more than just a truck.

5 YEAR WARRANTY

5 YEAR WARRANTY - STANDARD

Best-in-class 5 year/200,000 miles of extended engine warranty coverage standard. Extended engine and aftertreatment system warranties out to 7 years / 200,000 miles are available.

HINOCARE

HINOCARE - STANDARD

Preventive maintenance saves money and increases uptime across your entire fleet. HINOCARE multi-year programs mean you can match your needs with your long term goals for cost management. All M Series models include 2yr/60K miles coverage benefits free of charge!

24/7 ASSISTANCE HINOWATCH

HINOWATCH - STANDARD

24/7 Roadside Assistance is standard for 3 years on all Hino trucks - unlimited mileage. HINOWATCH includes lockout, out of fuel, battery jumpstart and warranty towing.

M SERIES - SPECIFICATIONS

ENGINE/DRIVETRAIN

Engine model	Hino JO5E-tp 5 liter diesel
Type	Diesel 4-cycle, 4 cylinder in line, water-cooled, dry cylinder liners
Turbocharger	Variable geometry
Fuel System	Common rail, direct injection type (Denso)
Max. output @ 2,500 rpm	210 hp
Max. torque @ 1,500 rpm	440 lb.-ft.
Emissions system	Cooled EGR with Selective Catalytic Reduction (SCR)
Transmission	Aisin A465 HD (PTO capable) 6 speed automatic with gear hold

TANKS

Fuel tank	28.8 gal. center mounted
Fuel pre-filter	Heated fuel water separator
DEF tank	4.7 gal.

AXLE/SUSPENSION

Front axle	Reverse Elliot, "I" beam
Front spring	Taper-leaf springs w/ shock absorbers & stabilizer
Rear axle	Full-floating single reduction; single-speed by hypoid gearing
Rear spring	Taper-leaf springs with shock absorbers

BRAKES

Service brake	Hydraulic system with disc brake for front and rear wheels
Exhaust brake	Electric - pneumatic with valve in exhaust pipe
Parking brake	Mechanical, internal expanding acting on transmission output shaft

ELECTRICAL EQUIPMENT

Batteries	Two, parallel connection, each 12V(1244CCA)
Alternator	12V, 130A, brushless

M4 GVWR: 14,500 LBS GCWR: 20,500 LBS

WEIGHT CAPACITIES

Front axle: 5,510 lbs. (114.2"WB) 5,950 lbs.(137.8"+WB) Rear axle: 9,880 lbs.

WHEELS AND TIRES

6 Wheels	Steel 17.5X6.00-127 6-stud disc
6 Tires	255/75R17.5, Fr-Rib, Rr-All Season


REAR AXLE/FRAME

Rear axle ratio	<input type="checkbox"/> STD 4.625 <input type="checkbox"/> OPT 4.875 <input type="checkbox"/> OPT 5.142
Frame yeild strength	56,900 PSI (353,450 RBM)


DIMENSIONS

Wheelbase (in.)	<input type="checkbox"/> 114.2 <input type="checkbox"/> 137.8 <input type="checkbox"/> 149.6 <input type="checkbox"/> 173.2				
Useable cab to axle (in.)	Day	86.4	110.0	121.9	145.5
	Crew			85.9	109.5

CAB CONFIGURATIONS (AVAILABLE FOR M4 & M5)

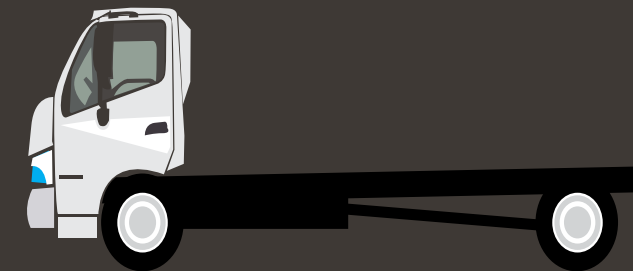

DAY CAB (Seats 3)
BBC: 66.5"

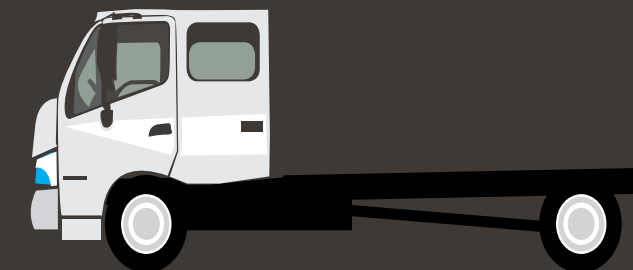

CREW CAB (Seats 7)
BBC: 106.3"



Front seat - day and crew cab



Rear seat - crew cab

M5 GVWR: 19,500 LBS GCWR: 25,500 LBS

WEIGHT CAPACITIES

Front axle: 7,270 lbs. Rear axle: 13,660 lbs.

WHEELS AND TIRES

6 Wheels	Steel 19.5X6.00-127 6-stud disc
6 Tires	225/70R19.5, Fr-Rib, Rr-All Season

REAR AXLE/SUSPENSION/FRAME

Rear axle ratio	<input type="checkbox"/> STD 5.571 <input type="checkbox"/> OPT 5.142 <input type="checkbox"/> OPT 5.857
Rear spring	<input type="checkbox"/> Additional helper spring
Frame yeild strength	56,900 PSI (353,450 RBM) (161"WB & below) 56,900 PSI (423,050 RBM)

DIMENSIONS

Wheelbase (in.)	<input type="checkbox"/> 114.2 <input type="checkbox"/> 137.8 <input type="checkbox"/> 149.6 <input type="checkbox"/> 161.4 <input type="checkbox"/> 173.2 <input type="checkbox"/> 196.9 <input type="checkbox"/> 214.6							
Usable cab to axle (in.)	Day	86.4	110.0	121.9	133.7	145.5	169.2	189.9
	Crew			83.2		106.8	130.5	148.2

HINO 
TRUCKS
A Toyota Group Company

M SERIES POPULAR OPTIONAL EQUIPMENT

- Cab paint, exterior - black, red, yellow, blue, green
- Limited slip differential
- Engine idle shutdown
- VIN tag derate to 17,950 (M5 only)
- Floor mats
- Front bumper fog lamp - white halogen
- Front bumper fog lamp - LED
- Magnetic suspension driver's seat
- Orange seat belts - Driver and Passengers
- Programmable speed limit 65, 70mph
- Cold Package
- Keyless Entry
- 102" Wide Side mirrors
- 3 Position V-Series Carling switch panel
- Lane Departure Warning System
- 55 gal. aluminim side mounted fuel tank (not available for all wheelbases)

- 33 gal. side mounted fuel tank
not available 114" WB



- LED Headlights

